

Monitoring Relays

1-Phase AC/DC Over Voltage - AC Over Current

Types DUA01, PUA01

CARLO GAVAZZI



DUA01



PUA01

- AC/DC over voltage monitoring relay
- Selection of measuring range by DIP-switches
- Measuring ranges: 2 to 20 VAC/DC, 5 to 50 VAC/DC, 20 to 200 VAC/DC, 50 to 500 VAC/DC, 0.4 to 4 V_p AC
- Adjustable voltage limit on relative scale
- Adjustable hysteresis
- Programmable latching at set level
- Output: 8 A SPDT relay normally de-energized
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DUA01) or plug-in module (PUA01)
- 22.5 mm Euronorm housing (DUA01) or 36 mm plug-in module (PUA01)
- LED indication for relay and power supply ON
- Galvanically separated power supply


Product Description

DUA01 and PUA01 are precise AC/DC over voltage monitoring relays. They can also be used as 1-phase or 3-phase over current monitoring relays when connected with MI or MP current transformers.

Owing to the built-in latch function, the ON-position of the relay output can be maintained. The red LED indicates the alarm status.

Ordering Key

DUA 01 C B23 500V

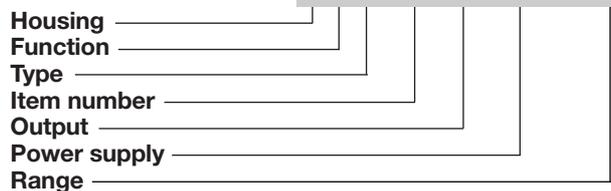

Type Selection

Mounting	Output	Supply: 24 VDC	Supply: 24/48 VAC	Supply: 115/230 VAC
DIN-rail	SPDT	DUA 01 C 724 500V	DUA 01 C B48 500V	DUA 01 C B23 500V
Plug-in	SPDT	PUA 01 C 724 500V	PUA 01 C B48 500V	PUA 01 C B23 500V

Input Specifications

Input (voltage level)	DUA01: Terminals Y1, Y2 PUA01: Terminals 5, 7	
Measuring ranges	Int. resist.	Max. volt.
Direct		
Selectable by DIP-switches		
2 to 20 VAC/DC	> 500 kΩ	600 V
5 to 50 VAC/DC	> 500 kΩ	600 V
20 to 200 VAC/DC	> 500 kΩ	600 V
50 to 500 VAC/DC	> 500 kΩ	600 V
0.4 to 4 V _p AC	> 500 kΩ	600 V
MI and MP CT ranges	AAC rms	Max. curr.
1-ph.: 3-ph.:		
MI 5 MP 3005	0.5 to 5 A	20 AAC
MI 20 MP 3020	2 to 20 A	50 AAC
MI 100 MP 3100	10 to 100 A	250 AAC
MI 500 MP 3500	50 to 500 A	750 AAC
Note:	The input voltage cannot raise over 300 VAC/DC with respect to ground (PUA01 only)	
Contact input	Terminals Z1, Y1 Terminals 8, 9	
DUA01	> 10 kΩ	
PUA01	< 500 Ω	
Disabled	> 500 ms	
Enabled		
Latch disable		

Output Specifications

Output	SPDT relay
Rated insulation voltage	250 VAC
Contact ratings (AgSnO ₂)	μ
Resistive loads	AC 1 DC 12
Small inductive loads	AC 15 DC 13
	8 A @ 250 VAC 5 A @ 24 VDC 2.5 A @ 250 VAC 2.5 A @ 24 VDC
Mechanical life	≥ 30 x 10 ⁶ operations
Electrical life	≥ 10 ⁵ operations (at 8 A, 250 V, cos φ = 1)
Operating frequency	≤ 7200 operations/h
Dielectric strength	
Dielectric voltage	≥ 2 kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 μs)

Supply Specifications

Power supply Rated operational voltage through terminals: A1, A2 or A3, A2 (DUA01) 2, 10 or 11, 10 (PUA01) 724: B48: B23:	Overvoltage cat. III (IEC 60664, IEC 60038)	
	24 VDC \pm 20%, insulated	AC supply
	24/48 VAC \pm 15% 45 to 65 Hz, insulated	4 kV
	115/230 VAC \pm 15% 45 to 65 Hz, insulated	4 kV
Dielectric voltage Supply to input Supply to output Input to output	DC supply 2 kV 4 kV 4 kV	AC supply 4 kV 4 kV 4 kV
Rated operational power AC DC	4 VA 2 W	

General Specifications

Reaction time Alarm ON delay	< 100 ms (voltage rising from -20% to +20% set value)
Alarm OFF delay	< 300 ms (voltage decreasing from +20% to -20% set value)
Accuracy Temperature drift Repeatability	(15 min warm-up time) \pm 1000 ppm/ $^{\circ}$ C \pm 0.5% on full-scale
Indication for Power supply ON Output relay ON	LED, green LED, red
Environment Degree of protection Pollution degree Operating temperature Storage temperature	(EN 60529) IP 20 3 (DUA01), 2 (PUA01) -20 to 60 $^{\circ}$ C, R.H. < 95% -30 to 80 $^{\circ}$ C, R.H. < 95%
Housing dimensions DIN-rail version Plug-in version	22.5 x 80 x 99.5 mm 36 x 80 x 87 mm
Weight	Approx. 150 g
Screw terminals Tightening torque	Max. 0.5 Nm acc. to IEC 60947
CE-Marking	Yes

Mode of Operation

DUA01 and PUA01 monitor both AC and DC over voltage. When connected with MI or MP current transformer (using the 0.4 - 4 V_p range) they can monitor 1-phase or 3-phase AC currents up to 500 A.

Example 1
(connection between terminals Z1, Y1 or 8, 9 - latch function enabled)

The relay operates and latches in operating position when the measured value exceeds the set level. Provided that the voltage has dropped min. 4% below the set point (see hysteresis), the relay releases when the interconnection between terminals Z1, Y1 or 8, 9 is interrupted or the power supply is interrupted as well.

Example 2 (MI CT)
(no connection between terminals Z1, Y1 or 8, 9)

The relay operates when the current flowing through the CT exceeds the set level. It releases when the current drops min. 4% below the set level (see hysteresis) or when power supply is interrupted.

(no connection between terminals Z1, Y1 or 8, 9 - latch function disabled)

The relay operates when the maximum current flowing through the CT exceeds the set level. It releases when the maximum current drops min. 4% below the set level (see hysteresis) or when power supply is interrupted.

Example 3 (MP CT)

Range - Level Setting

Selection of measuring range:
DIP-switch selector (1 to 4)



1 2 3 4	
ON 	2 to 20 VAC/DC
	5 to 50 VAC/DC
	20 to 200 VAC/DC
	50 to 500 VAC/DC
	0.4 to 4 V _p AC

Centre knob:
Setting of voltage on relative scale: from 10 to 110% of the full-scale value.

Hysteresis:
Approx. 4% of set value, it can be extended by inserting a resistor between terminals Z1, Y1 or 8, 9.

Approx. resistor values:
10%: 180 k Ω
25%: 47 k Ω
50%: 22 k Ω
75%: 15 k Ω
Latch: < 500 Ω

Operation Diagrams

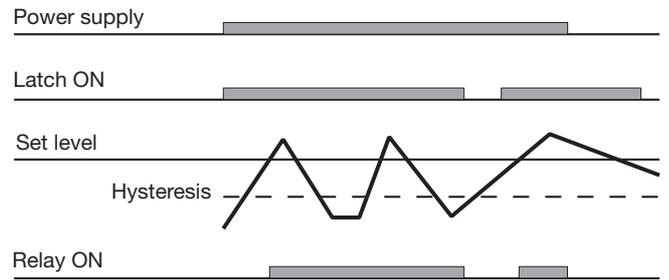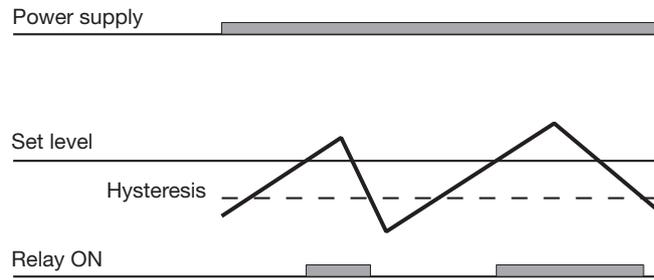

Wiring Diagrams

