

Channel Generator Types G 3490 0000

Dupline®
Fieldbus Installationbus



- Generates 8, 16, 24, 32, 40, 48, 56, 64, 96 or 128 channels
- Number of channels selectable by rotary switch
- Number of sequences (1 or 2) selectable
- Quartz-controlled oscillator
- Cable compensation
- DIN-rail mounting type (G3490) (EN 50022)
- LED-indication for supply and Dupline® carrier
- AC or DC power supply

Product Description

Standard channel generators for all Dupline® systems. Number of channels select-

able by means of a rotary switch.

Ordering Key

G 34900000 230

Type: Dupline® _____
Channel generator _____
Supply _____

Type Selection

Supply

24 VAC
115 VAC
230 VAC

15 to 30 VDC

Ordering no.
No. of channels selectable

G 3490 0000 024
G 3490 0000 115
G 3490 0000 230

G 3490 0000 824

Input/Output Specifications

Inputs

Function
Open loop voltage
Short-circuit current
Contact resistance
Cable length
Insulation voltage
Input - Dupline®

1 contact
2 sequences
12 VDC
1.25 mA
 $\leq 100 \Omega$
 ≤ 3 m
None

Outputs (cont.)

Sequence time * Time for 1 pulse train ($\pm 1\%$):

Rotary switch position:	No. of channels:	
A	8	15.63 ms
B	16	23.44 ms
C	24	31.25 ms
D	32	39.06 ms
E	40	46.87 ms
F	48	54.68 ms
G	56	62.49 ms
H	64	70.31 ms
L	96	101.54 ms
P	128	132.80 ms

Distance to transmitters

100% (refer to "Cable Selection")

* When using 2 sequences, the sequence time will be 2 times higher.

Supply Specifications

Power supply AC types	Overvoltage cat. III (IEC 60664)
Rated operational voltage through term.: 21 & 22	230 VAC ± 10% (IEC 60038) 115 VAC ± 10% (IEC 60038) 24 VAC ± 10%
Frequency	45 to 65 Hz
Power dissipation	4 W
Voltage interruption	≤ 40 ms
Rated operational power	Typ. 2.5 VA
Rated impulse withstand voltage	230 VAC 115 VAC 024 VAC
Dielectric voltage Supply - Dupline®	≥ 4 kVAC (rms)
Supply - Inputs	≥ 4 kVAC (rms)
Power supply DC types	Overvoltage cat. III (IEC 600664)
Rated operational voltage through term.: 21 & 22	824 VDC (ripple included)
Power dissipation	3 W
Ripple	≤ 3 V
Reverse polarity protection	Yes
Current consumption	≤ 90 mA
Inrush current	≤ 1 A
Rated impulse withstand voltage	800 V
Dielectric voltage Supply - Dupline®	None
Supply - Input	≥ 200 VAC (rms)

General Specifications

Power ON delay	≤ 3 s
Indication for Supply ON Dupline® carrier	LED, green LED, yellow
Environment Degree of protection Pollution degree Operating temperature Storage temperature	IP 20 3 (IEC 60664) -20° to +50°C (-4° to +122°F) -50° to +85°C (-58° to +185°F)
Humidity (non-condensing)	20 to 80%
Mechanical resistance Shock Vibration	15 G (11 ms) 2 G (6 to 55 Hz)
Dimensions Material (see "Technical Information")	H4-housing
Weight	250 g

Mode of Operation

The channel generator generate a pulse trains and synchronize the transmission signal for an entire system of Dupline® modules. At the same time it supply non-powered Dupline® transmitters.

The selection of 1 or 2 sequences means that 1 or 2 consecutive signals of a transmitter must show identical status until the channel generator changes the duty cycle for the respective channel. This change of duty cycle causes the receivers to change their status.

Note:

- Do not use 2 sequences if analog modules or counters are connected to the system.
- The transmission distance of a Dupline® network is reduced by 33% when using 2 sequences, compared to the figures given under "Cable Selection".

In Dupline® systems with digital transmitters and receivers the use of 2 sequences is only recommended in cases of extremely long cabling in high noise level environment. Application of 2 sequences

results in absolutely correct transmission but also in a slow reaction time for the system.

HF disturbance that is induced to the Dupline® may be suppressed by interconnection of terminals 4 & 1. For inductive cables a separate capacitor of less than 1 µF may be mounted between terminals 1 & 2. But in the majority of cases the cable appears to be capacitive requiring no additional capacitor.


Note: It is highly recommended to place the

channel generator in the middle of a Dupline® system.


Operation Diagram



Wiring Diagrams

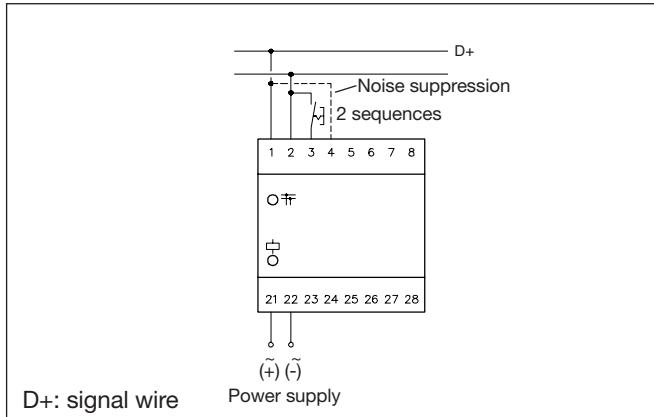

Dimensions (mm)

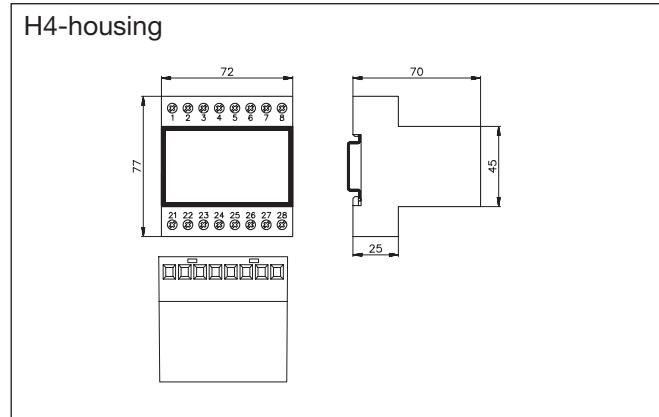

Accessories

DIN-rail

FMD 411

For further information refer to "Accessories".