

Solid State Relays Industrial, 1-Phase ZS, Fully Pluggable Type RX1A

CARLO GAVAZZI



- Zero switching (RX1A) AC Solid State Relay
- Direct copper bonding (DCB) technology
- LED indication
- IP 20 protection cover
- Screw, Spring or FASTON terminal options
- Housing free of moulding mass
- 2 input ranges: 4-32 VDC and 24-275 VAC
- Operational ratings up to 50 AACrms and 480 VACrms
- Non-repetitive voltage: Up to 1200 V_p
- Opto-insulation: > 4000 VACrms
- Integrated snubber network

Product Description

The RX ThyReX is an extremely compact industrial SSR that is fully pluggable to make installation and servicing easy. This zero switching relay can be used for resistive and inductive loads. The position of the M4 mounting holes makes this solution interchangeable with standard hockey-puck relays. The control plug can have either screw or spring termi-

nals. The power connection can be a screw type plug, a spring type plug or an open two-spade FASTON solution that comes with safety covers (no plugs). Both screw and spring type power plugs have a specially designed security lever to lock/unlock. To facilitate assembly, the RX ThyReX can be ordered with its own thermal pad (optional).

Ordering Key

RX 1 A 48 D 32 M P HT

Solid State Relay

Number of poles

Switching mode

Rated operational voltage

Control voltage

Rated operational current

Control plug type

Power plug type

Options

Type Selection

Switching mode	Rated operational voltage	Control voltage	Rated operational current	Control plug type	Power plug type	Options
A: Zero Switching	23: 230 VACrms 48: 480 VACrms	A: 24-275 VAC D: 4 - 32 VDC	25 : 25 AACrms 32 : 50 AACrms 51 : 50 AACrms*	M: Spring V: Screw	F: Faston C: Screw P: Spring	Blank: Basic HT: Thermal Pad H20: RHS23A** H21: RHS23B**

* High surge

** Add suffix 'H2x' to RX part no. for mounting of RX unit to heatsink type RHS23A or RHS23B. For such assemblies, attached derating curve should be consulted for appropriate selection of operational load current. Note that RX1A...25...H21 version is not available.

General Specifications

	RX1A23..	RX1A48..
Operational voltage range	24 to 265 VACrms	42 to 552 VACrms
Non-rep. peak voltage	≥ 650 V _p	≥ 1200 V _p
Zero voltage turn-on	≤ 10 V	≤ 10 V
Operational frequency range	45 to 65 Hz	45 to 65 Hz
Power factor	> 0.5 @ 230 VACrms	> 0.5 @ 480 VACrms
Pollution degree		
RX1A...D...	3	3
RX1A...A...	2	2
Approvals	UL, cUL, CSA*	UL, cUL, CSA*
CE-marking	Yes	Yes

* RX1A...51 not CSA certified

Thermal Specifications

Operating temperature	-30° to +70°C (-22° to +158°F)
Storage temperature	-40° to +80°C (-40° to +176°F)
Junction temperature	≤ 125°C (257°F)

Insulation

Rated insulation voltage	
Input to output	≥ 4000 VACrms
Output to case	≥ 4000 VACrms

Control Plug with Spring Terminals - Power Plug with Spring Terminals

Rated operational voltage	Non-rep. voltage	Control voltage	Rated operational current		
			25 A	50 A	50 A (high surge)
230 VACrms	650Vp	4-32 VDC 24-275 VAC	RX1A23D25MP RX1A23A25MP	RX1A23D32MP RX1A23A32MP	RX1A23D51MP RX1A23A51MP
480 VACrms	1200Vp	4-32 VDC 24-275 VAC	RX1A48D25MP RX1A48A25MP	RX1A48D32MP RX1A48A32MP	RX1A48D51MP RX1A48A51MP

Control Plug with Spring Terminals - Power Plug with Screw Terminals

Rated operational voltage	Non-rep. voltage	Control voltage	Rated operational current		
			25 A	50 A	50 A (high surge)
230 VACrms	650Vp	4-32 VDC 24-275 VAC	RX1A23D25MC RX1A23A25MC	RX1A23D32MC RX1A23A32MC	RX1A23D51MC RX1A23A51MC
480 VACrms	1200Vp	4-32 VDC 24-275 VAC	RX1A48D25MC RX1A48A25MC	RX1A48D32MC RX1A48A32MC	RX1A48D51MC RX1A48A51MC

Control Plug with Screw Terminals - Power Plug with Screw Terminals

Rated operational voltage	Non-rep. voltage	Control voltage	Rated operational current		
			25 A	50 A	50 A (high surge)
230 VACrms	650Vp	4-32 VDC 24-275 VAC	RX1A23D25VC RX1A23A25VC	RX1A23D32VC RX1A23A32VC	RX1A23D51VC RX1A23A51VC
480 VACrms	1200Vp	4-32 VDC 24-275 VAC	RX1A48D25VC RX1A48A25VC	RX1A48D32VC RX1A48A32VC	RX1A48D51VC RX1A48A51VC

Control Plug with Screw Terminals - Power Plug with Spring Terminals

Rated operational voltage	Non-rep. voltage	Control voltage	Rated operational current		
			25 A	50 A	50 A (high surge)
230 VACrms	650Vp	4-32 VDC 24-275 VAC	RX1A23D25VP RX1A23A25VP	RX1A23D32VP RX1A23A32VP	RX1A23D51VP RX1A23A51VP
480 VACrms	1200Vp	4-32 VDC 24-275 VAC	RX1A48D25VP RX1A48A25VP	RX1A48D32VP RX1A48A32VP	RX1A48D51VP RX1A48A51VP

Control Plug with Spring Terminals - Power: FASTON Terminals

Rated operational voltage	Non-rep. voltage	Control voltage	Rated operational current		
			25 A	50 A	50 A (high surge)
230 VACrms	650Vp	4-32 VDC 24-275 VAC	RX1A23D25MF RX1A23A25MF	RX1A23D32MF RX1A23A32MF	RX1A23D51MF RX1A23A51MF
480 VACrms	1200Vp	4-32 VDC 24-275 VAC	RX1A48D25MF RX1A48A25MF	RX1A48D32MF RX1A48A32MF	RX1A48D51MF RX1A48A51MF

Control Plug with Screw Terminals - Power: FASTON Terminals

Rated operational voltage	Non-rep. voltage	Control voltage	Rated operational current		
			25 A	50 A	50 A (high surge)
230 VACrms	650Vp	4-32 VDC 24-275 VAC	RX1A23D25VF RX1A23A25VF	RX1A23D32VF RX1A23A32VF	RX1A23D51VF RX1A23A51VF
480 VACrms	1200Vp	4-32 VDC 24-275 VAC	RX1A48D25VF RX1A48A25VF	RX1A48D32VF RX1A48A32VF	RX1A48D51VF RX1A48A51VF

Note: It is possible to have units with output Spring Terminals and input Screw Terminals and vice-versa, i.e., output Screw Terminals and input Spring Terminals.

Output Specifications

	RX1A...25...	RX1A...32...	RX1A...51... (high surge)
Rated operational current AC51 @ Ta=25°C AC53a @ Ta=25°C	25 Arms 5 Arms	50 Arms 15 Arms	50 Arms 20 Arms
Min. operational current	150 mA	250 mA	350 mA
Non-rep. surge current t=10 ms	325 A _p	600 A _p	1150 A _p
Off-state leakage current @ rated voltage and frequency	< 3 mArms	< 3 mArms	< 3 mArms
I ² t for fusing t= 1-10 ms	< 525 A ² s	< 1800 A ² s	< 6600 A ² s
On-state voltage drop	≤ 1.6 Vrms	≤ 1.6 Vrms	≤ 1.6 Vrms
Critical dV/dt off-state min.	500 V/μs	500 V/μs	500 V/μs

Housing Specifications


Weight without plugs with plugs	Approx. 64 g Approx. 86 g	Power terminal (screw)	
Housing material	PA, grey	Terminal screws	M4
Baseplate	Aluminium	Maximum tightening torque	2 Nm with Posidriv 2 bit
Control terminal (screw)		Min. cross-sectional area of cable with bootlace ferrule	1 x 1.5mm ² (1 x AWG16)
Terminal tightening screws	M3	Max. cross-sectional area of cable with bootlace ferrule	1 x 6.0mm ² (1 x AWG10) or 2 x 6.0mm ² (2 x AWG10)
Max. terminal tightening torque	0.8 Nm with Philips bit	Ring terminal, max. outer diameter	10mm
Min. cross-sectional area of cable (stranded)	1 x 0.05mm ² (1 x AWG30)	Power terminal (spring)	
Max. cross-sectional area of cable (stranded)	1 x 2.5mm ² (1 x AWG12) or 2 x 1.5mm ² (2 x AWG16)	Insulation stripping length	13mm
Control terminal (spring)		Min. cross-sectional area of cable (stranded)	1 x 0.5mm ² (1 x AWG20)
Insulation stripping length	10mm	Max. cross-sectional area of cable (stranded)	2 x 6.0mm ² (2 x AWG10)
Min. cross-sectional area of cable (stranded)	1 x 0.2mm ² (1 x AWG24)	Power terminal (FASTON)	
Max. cross-sectional area of cable (stranded)	1 x 2.5mm ² (1 x AWG12)	FASTON terminal size	6.3 x 0.8mm
		Max. allowable relative humidity (no moisture condensation)	95%
		Mounting	
		Mounting screws	M4
		Mounting torque	1.5 Nm

Input Specifications

	RX1A...D...	RX1A...A...
Control voltage range	4-32 VDC	24 - 275 VAC
Pick-up voltage	3.5 VDC	18 VAC
Reverse voltage	32 VDC	-
Drop out voltage	1.2 VDC	6 VAC
Input current @ max input voltage	≤ 12 mA	-
RMS input current	-	≤ 36 mA
Average rectified input current	-	≤ 12 mA
Response time pick-up	≤ 10 ms	≤ 20 ms
Response time drop-out	≤ 10 ms	≤ 70 ms


Data specified @ Ta=25°C

Dimensions

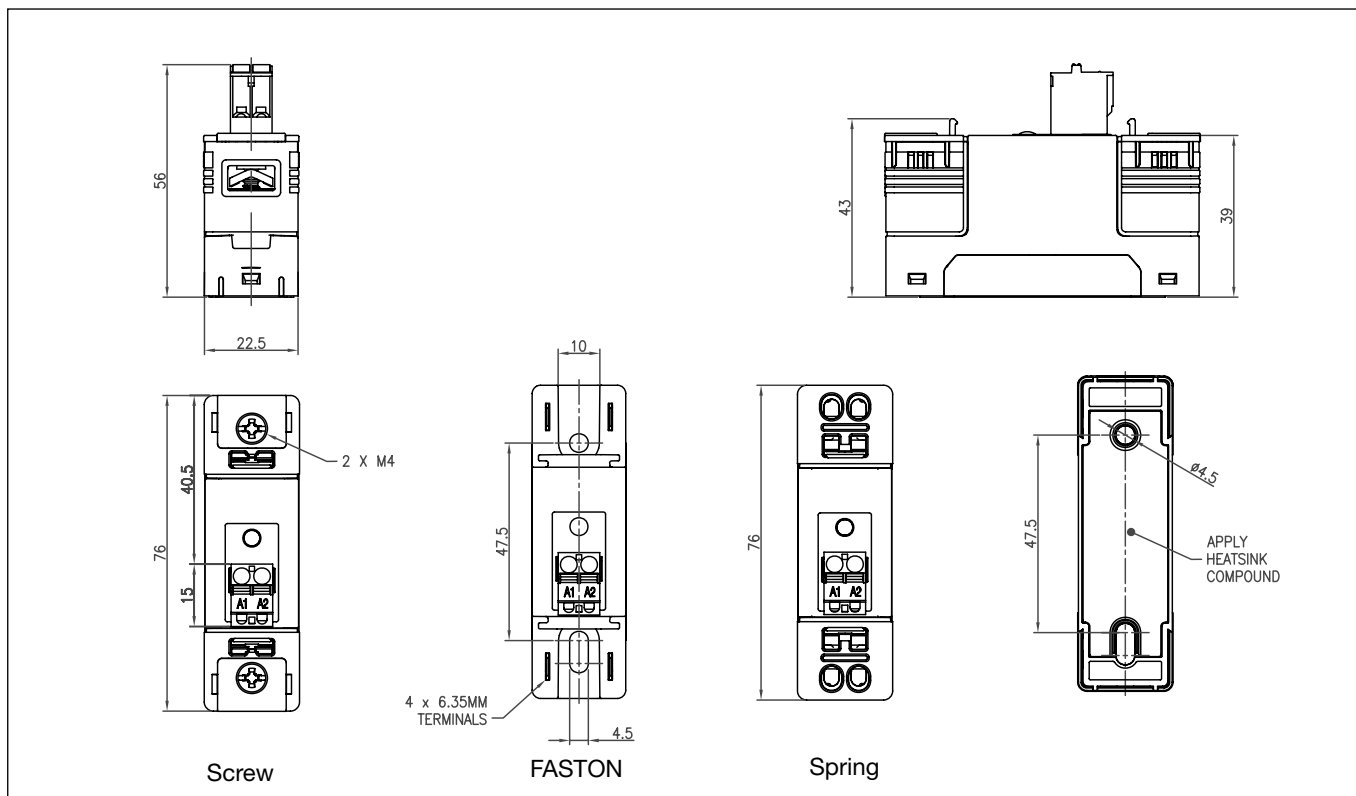

All dimensions in mm


RX1A on RHS23A heatsink

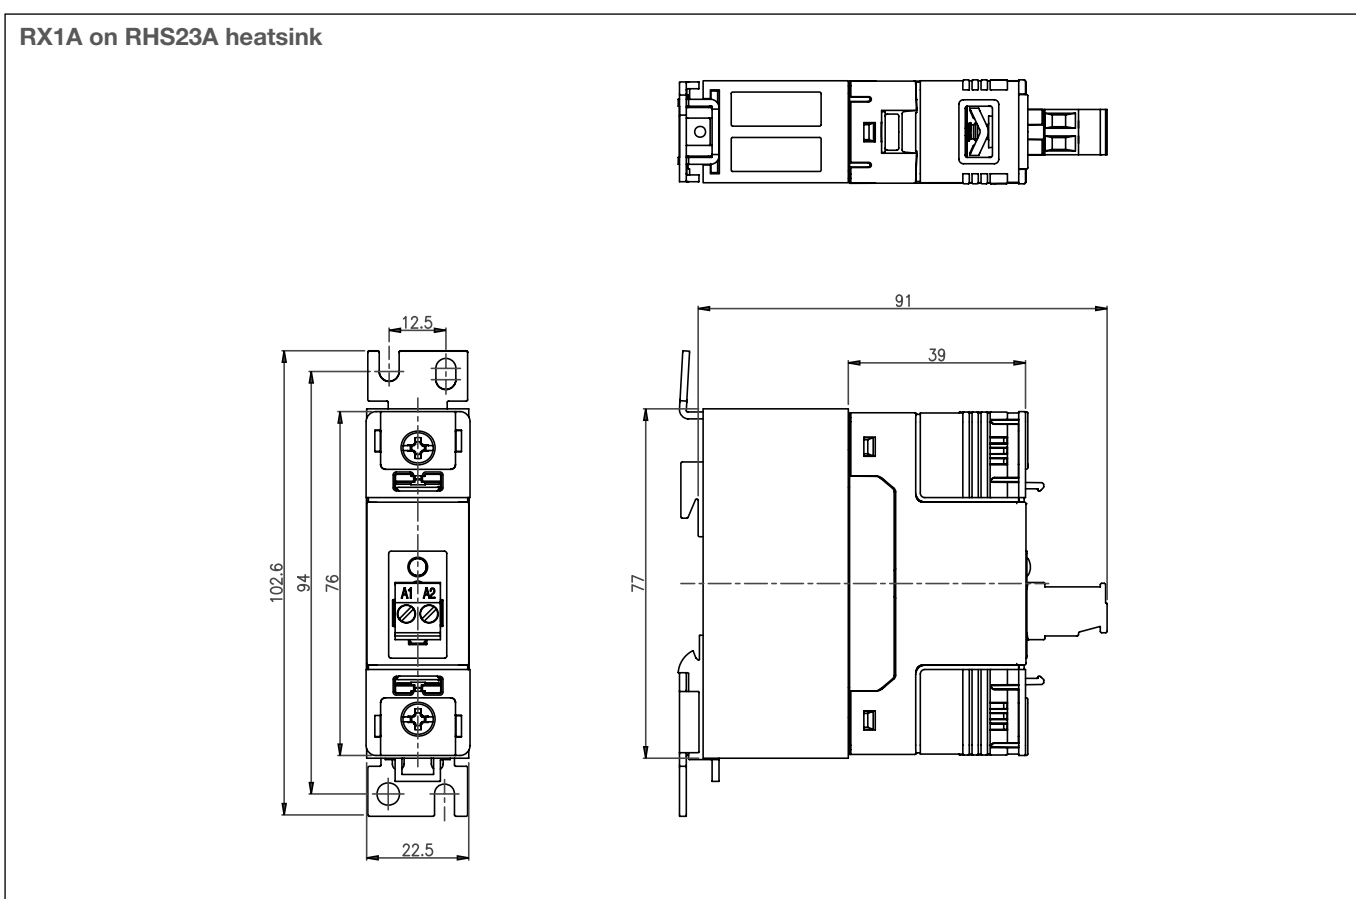

All dimensions in mm


Dimensions (cont.)

RX1A on RHS23B heatsink

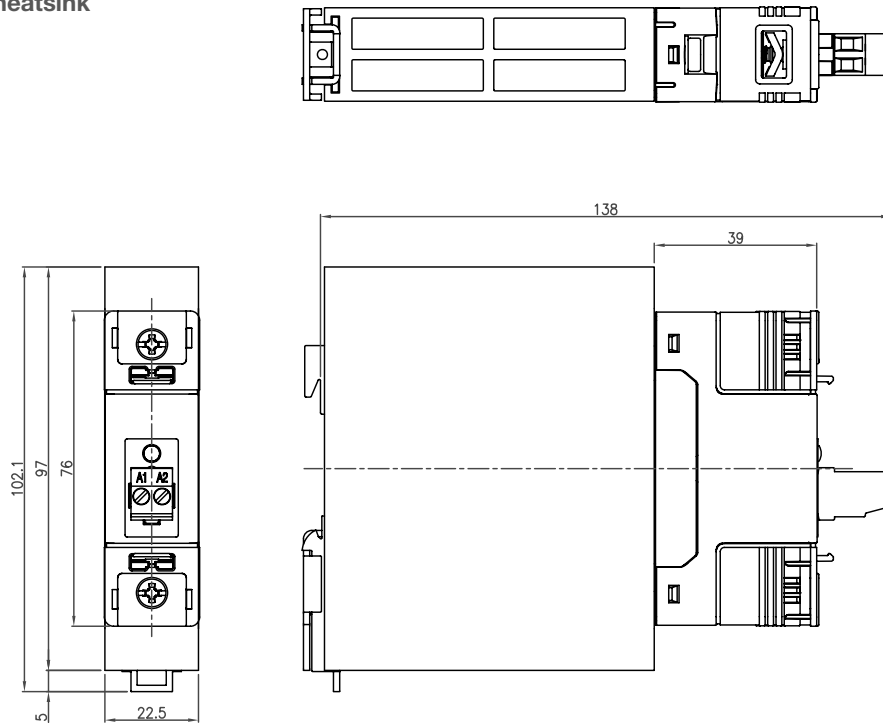


All dimensions in mm

Wiring Diagram

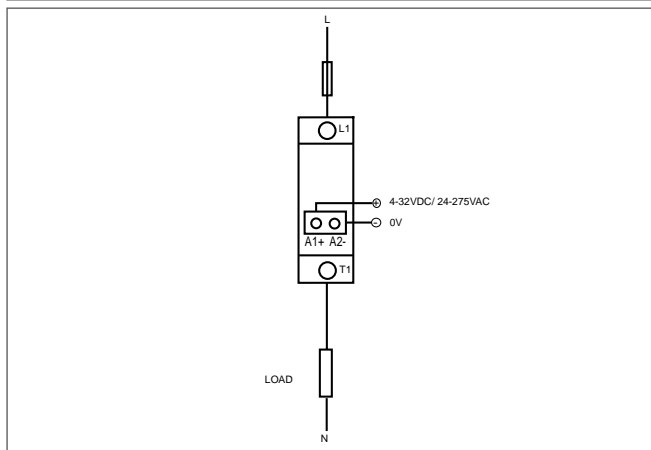

Functional Diagram

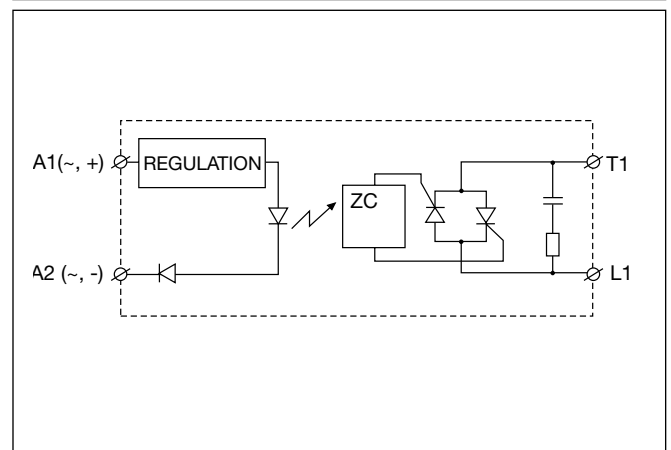

Accessories

RX1A....25, RX1A....32, RX1A....51
 RCV25
 RCM25
 RPC60
 RPP60
 RPFCAP

Main module without input or output plugs
 Packet of 20 input plugs with screw terminals
 Packet of 20 input plugs with spring terminals
 Packet of 10 output plugs with screw terminals
 Packet of 10 output plugs with spring terminals
 Packet of 10 FASTON touch protection covers

Heatsink Dimensions (load current versus ambient temperature)

RX1A...25

Load Current (A)	Thermal Resistance [K/W]						Power Dissipation (W)
	20	30	40	50	60	70	
25.0	1.61	1.30	0.98	0.51	0.05	-	32
22.5	2.10	1.74	1.38	0.87	0.33	-	28
20.0	2.73	2.31	1.89	1.33	0.68	0.06	24
17.5	3.55	3.05	2.56	1.95	1.16	0.41	20
15.0	4.66	4.06	3.46	2.83	1.83	0.89	17
12.5	6.24	5.49	4.74	3.98	2.83	1.59	13
10.0	8.65	7.67	6.68	5.70	4.46	2.72	10
7.5	12.7	11.3	9.97	8.60	7.23	4.79	7
5.0	-	18.8	16.6	14.5	12.3	9.8	5
2.5	-	-	-	-	-	-	2

Surrounding Ambient temperature (°C)

RX1A...32

Load Current (A)	Thermal Resistance [K/W]						Power Dissipation (W)
	20	30	40	50	60	70	
50	0.99	0.74	0.49	0.25	-	-	66
45	1.25	0.96	0.68	0.39	0.11	-	58
40	1.59	1.25	0.91	1.58	0.25	-	50
35	2.04	1.63	1.22	0.82	0.43	0.04	42
30	3.08	2.65	2.15	1.65	1.16	0.68	35
25	4.01	3.56	2.9	2.26	1.64	1.03	28
20	5.42	4.84	4.09	3.22	2.39	1.58	21
15	7.8	6.99	6.18	4.93	3.7	2.52	15
10	12.6	11.3	10.1	8.8	6.57	4.55	10
5	-	-	-	19.2	16.5	11.8	5

Surrounding Ambient temperature (°C)

RX1A...51

Load Current (A)	Thermal Resistance [K/W]						Power Dissipation (W)
	20	30	40	50	60	70	
50	1.6	1.38	0.93	0.71	0.48	-	48
45	1.88	1.62	1.37	1.11	0.86	0.6	43
40	2.22	1.93	1.63	1.34	1.05	0.75	37
35	2.67	2.33	1.98	1.64	1.29	0.95	32
30	3.27	2.86	2.45	2.03	1.62	1.21	27
25	4.13	3.62	3.11	2.6	2.09	1.59	22
20	5.43	4.76	4.11	3.45	2.8	2.15	17
15	7.63	6.71	5.8	4.89	3.99	3.1	12
10	12.2	10.7	9.26	7.83	6.42	5.03	8
5	26.8	23.5	20.2	11.1	14	11	4

Surrounding Ambient temperature (°C)

Notes:

1. Device must be mounted on a heatsink or plate with both mounting screws fastened for correct operation.
2. Thermal resistance values indicated above are valid for assemblies using thermal paste Electrolube HTS or thermal pad Graftech HT010A, i.e., $R_{thcs}=0.16K/W$. For thermal paste/pads with a higher R_{th} , manufacturer should be consulted for selection of appropriate heatsinking.

Derating Curves (RX assembled to heatsink types RHS23x)

