

# Energy Management

## Energy with output module

### Type EM3-DIN

CARLO GAVAZZI



- Class 2 (active energy)
- Class 3 (reactive energy)
- Active reactive energy meter
- Direct connection up to 90A
- Electromechanical display 6+1DGT
- LED for the indication of the consumed energy
- Selection of the displayed energy by means of dip-switch
- Optional pulse output (as a module)
- Self power supply or auxiliary power supply  
115VAC, 230VAC 50-60Hz
- Full compliance with EN61036 (active energy, class 2)
- Full compliance with EN61268 (reactive energy, class 3)
- Dimensions: 9 DIN-modules
- Sealable housing

## Product description

EM3-DIN is a three-phase energy meter for the measure of active or reactive energy; the 208V<sub>L-L</sub> and 400V<sub>L-L</sub> meters are self-supplied, while the 660V<sub>L-L</sub> meters are provided with auxiliary power

supply. EM3-DIN is provided with: 6+1DGT electromechanical indicator for the indication of kWh or kvarh; one green LED for the indication of power ON; one red LED blinking proportionally to the consumed energy.

## How to order

**EM3-DIN AV9 3 X X**

Model \_\_\_\_\_  
Range code \_\_\_\_\_  
System \_\_\_\_\_  
Power supply \_\_\_\_\_  
Slot A \_\_\_\_\_

## Type selection

Range code	System	Power supply	Slot A (retransmission)
<b>Auxiliary Power Supply (C or D):</b> <b>AV3:</b> 660V <sub>L-L</sub> / 20(90)AAC	<b>3</b> : Three-phase, unbalanced load	<b>C:</b> 115VAC - 15+10% 50-60Hz (only range AV3)	<b>X:</b> None
<b>Self Power Supply (X):</b> <b>AV8:</b> 208V <sub>L-L</sub> / 20(90)AAC		<b>D:</b> 230VAC -15+10% 50-60Hz (only range AV3)	<b>O:</b> Module AO2900 Dual open collector pulse output
<b>AV9:</b> 400V <sub>L-L</sub> / 20(90)AAC		<b>X:</b> Self power-supply	

## Input specifications

<b>Accuracy</b> Active energy Reactive energy	Class 2, according to EN61036 Class 3, according to EN61268	AV8 (AE2001) AV9 (AE2000)	Un: 208V <sub>L-L</sub> , -20%≤Un≤+15%, 50-60Hz Un: 400V <sub>L-L</sub> , -20%≤Un≤+15%, 50-60Hz
<b>Additional errors</b> Voltage variation Frequency variation Wave form Voltage disymmetry	Acc. to EN61036, EN61268 < 0.5% < 0.5% <1% (3 <sup>rd</sup> harmonic: 10%) < 0.5% (referred to the rated input voltage)	<b>Input impedance</b> AV3 AV8 AV9	> 1.97MΩ (660V <sub>L-L</sub> ) > 720KΩ (208V <sub>L-L</sub> ) > 720KΩ (400V <sub>L-L</sub> )
External continuous magnetic induction Magnetic induction HF electromagnetic field Accessories influence	0 0 (up to 0.5 mT) < 1% 0	<b>Frequency</b>	50-60 Hz
<b>Temperature drift</b>	≤ 250 ppm/°C	<b>Electrical system</b>	3-phase, balanced or unbalanced with or without neutral. Note: in the self-supplied version, the neutral must be connected to the measuring inputs.
<b>Measurements</b> Wave form	Active or reactive energy sinusoidal and distorted	<b>Display</b>	Electromechanical type 6+1 DGT Green LED, ON if supplied Red LED, 640 imp./kWh/ kvarh (min. period: 0.5s)
<b>Crest factor (I ≤ 20A)</b>	≤ 6 (127A peak max)	Power supply Energy consumption	
<b>Basic current (Ib)</b>	20A (according to EN61036 /EN61268)	<b>Selection of displayed energy</b> Dip-switch 1	By means of DIP-switch ON: active energy OFF: reactive energy
<b>Maximum current (I<sub>max</sub>)</b>	90A (according to EN61036/EN61268)		
<b>Overload</b> Continuous: current For 10ms: current	4.5 x Ib 30 I <sub>max</sub> @ 50Hz		
<b>Rated input voltage</b> AV3 (AE2002, AE2003)	Un: 660V <sub>L-L</sub> , -20%≤Un≤+15%, 50-60Hz		

## Output specifications

<b>Pulse outputs</b> (on request)	AO2900, slot A	Pulse duration	220ms (ON), ≥200ms (OFF)
Number of outputs	2	Leakage current	according to DIN43864
Channel 1	Pulse outputs to be used as retransmission of the energies:	Insulation	≤10μA, @ 30V, 60°C
Channel 2	active energy		By means of optocouplers, 2000Vrms for 1 minute
Number of pulses	reactive energy		between measuring inputs and pulse outputs.
Type	10 / kWh, 10 / kvarh		Insulation between the two outputs: functional
	Open collector (NPN transistor)		
	V <sub>ON</sub> 1.2VDC / max 100mA		
	V <sub>OFF</sub> 30VDC max		

## Power supply specifications

<b>Self power supply</b>	400VAC V <sub>L-L</sub> -20% +15% 50-60Hz 208VAC V <sub>L-L</sub> -20% +15% 50-60Hz	<b>Auxiliary power supply</b>	230VAC -15+10% 50-60Hz 115VAC -15+10% 50-60Hz
--------------------------	--	-------------------------------	--

## General specifications




<b>Operating temperature</b>	-20 to +55°C (14°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C) according to EN61036 and EN61268	<b>Standards</b>	Metrology Safety Pulse output	EN61036, EN61268 IEC-664 DIN 43864
<b>Storage temperature</b>	-20 to +70°C (14°F to 140°F)	<b>Connections</b>	Cable cross-section area	Screw-type, Max. 35 mm <sup>2</sup> (measuring inputs) Min. 6 mm <sup>2</sup> (measuring inputs) Other inputs: 4 mm <sup>2</sup> 2 Nm / 6 Nm (90A inputs)
<b>Dielectric strength</b>	4000Vrms for 1 minute		Min./Max. screws tightening torque	
<b>Installation category</b>	Cat. III (IEC 664)	<b>Housing</b>	Dimensions Material	162.5 x 90 x 63 mm ABS, NORYL, PC self-extinguishing
<b>EMC</b>		<b>Mounting</b>		DIN-rail or wall
Burst	4kV / level 4 (EN61000-4-4)	<b>Degree of protection</b>		Front: IP40 Screw terminals: IP20
Immunity to irradiated electromagnetic fields	10V/m from 26 to 1000MHz (EN61000-4-3) 15kV (EN61000-4-2) according to CISPR 14 and CISPR 22	<b>Weight</b>		Approx. 800 g (packing included)
Electrostatic discharges				
Radio frequency emissions				
<b>Pulse voltage (1.2/50μs)</b>	8kV (EN61000-4-5)			

## Available models and modules

Type	Inputs	Power Supply	Number of channels	Ordering code
EM3-DIN AV9.3.X	400V <sub>L-L</sub> / 20(90)AAC	Self power supply		AE2000
EM3-DIN AV8.3.X	208V <sub>L-L</sub> / 20(90)AAC	Self power supply		AE2001
EM3-DIN AV3.3.C	660V <sub>L-L</sub> / 20(90)AAC	115VAC - 15+10%		AE2002
EM3-DIN AV3.3.D	660V <sub>L-L</sub> / 20(90)AAC	230VAC - 15+10%		AE2003
Open collector output			2	AO2900


## Wiring diagrams

### EM3-DIN 20(90)A

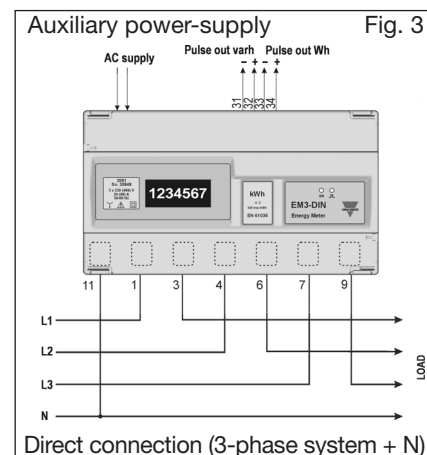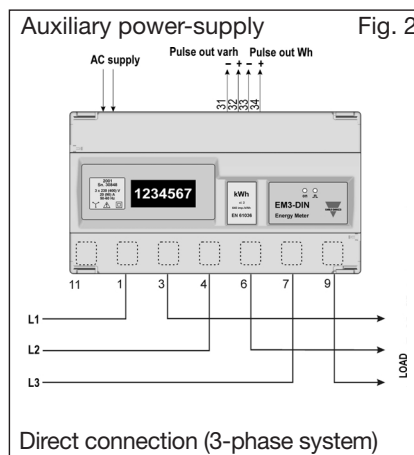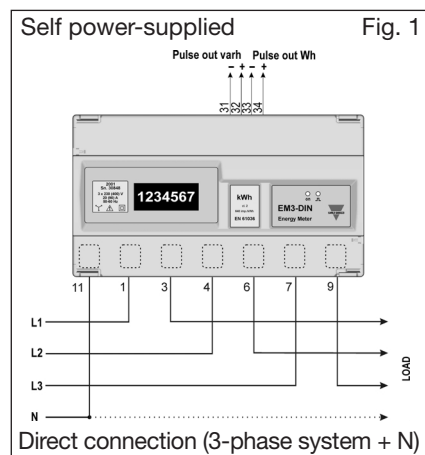

## Wiring diagrams (optional module)


### Open collector output

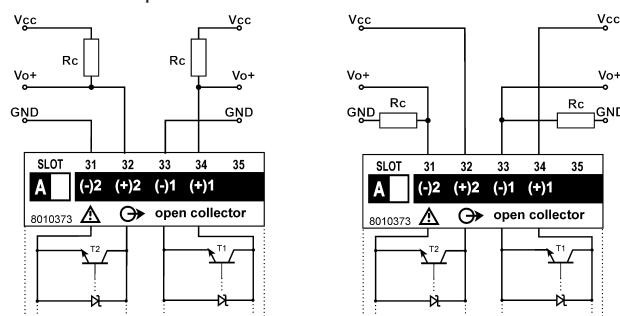

The grounds of the outputs are separated, and therefore it's possible to carry out, for the same module, two different connections. The load resistance ( $R_c$ ) must be designed so that the closed contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30V.


## Terminal board

### Dual open collector output module



AO 2900

## Front panel description

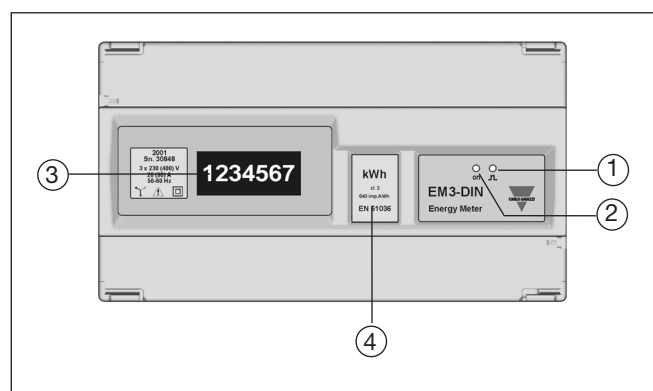

- Red LED**  
Indicates the consumed energy (640 pulses / kWh, minimum period 0.5ms) blinking proportionally.
- Green LED**  
Indicates power ON.
- Display**  
Electromechanical type, 6+1 DGT, displays kWh or kvarh according to the selection made by means of an internal dip-switch.
- Engineering unit**  
Removable double sided [front (kWh) / back (kvarh)] label

**Dimensions**

