


Insulated ferrule; for Rail-Mount Terminal Block TOPJOB® S




Ferrule; insulated; electro-tin-plated; electrolytic copper; gastight crimped; per DIN 46288 (Part 4/09.09)

Conductor Cross Section	Color	Strip Length	L	L 1	D	D 1	D 2	Item No.	Pack. Unit
0.5 mm ² / 20 AWG	○ white	12 mm / 0.47 inch	16	10	3.1	2.6	1	216-241	1000
0.75 mm ² / 18 AWG	○ gray	12 mm / 0.47 inch	16	10	3.3	2.8	1.2	216-242	1000
0.75 mm ² / 18 AWG	○ gray	14 mm / 0.55 inch	18	12	3.3	2.8	1.2	216-262	1000
1 mm ² / 18 AWG	● red	12 mm / 0.47 inch	16	10	3.5	3	1.4	216-243	1000
1 mm ² / 18 AWG	● red	14 mm / 0.55 inch	18	12	3.5	3	1.4	216-263	1000
1.5 mm ² / 16 AWG	● black	12 mm / 0.47 inch	16	10	4	3.5	1.7	216-244	1000
1.5 mm ² / 16 AWG	● black	14 mm / 0.55 inch	18	12	4	3.5	1.7	216-264	1000
1.5 mm ² / 16 AWG	● black	20 mm / 0.79 inch	24	18	4	3.5	1.7	216-284	500
2.5 mm ² / 14 AWG	● blue	12 mm / 0.47 inch	17	10	4.7	4.2	2.2	216-246	1000
2.5 mm ² / 14 AWG	● blue	14 mm / 0.55 inch	19	12	4.7	4.2	2.2	216-266	1000
2.5 mm ² / 14 AWG	● blue	20 mm / 0.79 inch	25	18	4.7	4.2	2.2	216-286	500
4 mm ² / 12 AWG	○ gray	14 mm / 0.55 inch	20	12	5.4	4.8	2.8	216-267	500
4 mm ² / 12 AWG	○ gray	20 mm / 0.79 inch	26	18	5.4	4.8	2.8	216-287	100
6 mm ² / 10 AWG	● yellow	14 mm / 0.55 inch	20	12	6.9	6.3	3.5	216-208	100
6 mm ² / 10 AWG	● yellow	20 mm / 0.79 inch	26	18	6.9	6.3	3.5	216-288	100
10 mm ² / 8 AWG	● red	20 mm / 0.79 inch	28	18	8.4	7.6	4.5	216-289	100
16 mm ² / 6 AWG	● blue	23 mm / 0.91 inch	28	18	9.6	8.8	5.8	216-210	100

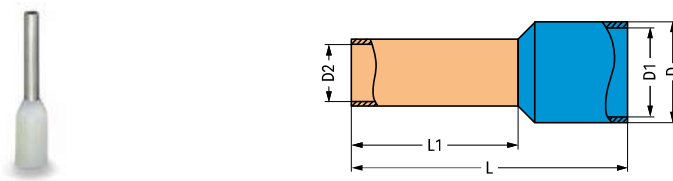


Fine-stranded conductors with ferrules from at least two sizes below the rated cross section up to the rated cross section can also be simply pushed in – without tools.

Insulated and Uninsulated Ferrules; for Chassis-Mount Terminal Strip

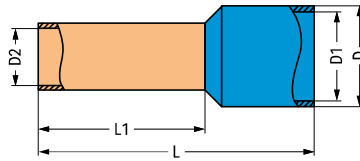

Ferrule; insulated; electro-tin-plated; electrolytic copper; gastight crimped; per DIN 46288 (Part 4/09.09)


Conductor Cross Section	Color	Strip Length	L	L 1	D	D 1	D 2	Item No.	Pack. Unit
0.5 mm ² / 20 AWG	○ white	12 mm / 0.47 inch	16	10	3.1	2.6	1	216-241	1000
0.75 mm ² / 18 AWG	○ gray	12 mm / 0.47 inch	16	10	3.3	2.8	1.2	216-242	1000
1 mm ² / 18 AWG	● red	12 mm / 0.47 inch	16	10	3.5	3	1.4	216-243	1000
1.5 mm ² / 16 AWG	● black	12 mm / 0.47 inch	16	10	4	3.5	1.7	216-244	1000



Ferrule; uninsulated; electro-tin-plated; electrolytic copper; gastight crimped; per DIN 46288 (Part 4/09.09)


Conductor Cross Section	Strip Length	L	D	D 2	Item No.	Pack. Unit
0.5 mm ² / 20 AWG	10 mm / 0.39 inch	10	2.1	1	216-141	5000 (1000)
0.75 mm ² / 18 AWG	10 mm / 0.39 inch	10	2.3	1.2	216-142	5000 (1000)
1 mm ² / 18 AWG	10 mm / 0.39 inch	10	2.5	1.4	216-143	5000 (1000)
1.5 mm ² / 16 AWG	10 mm / 0.39 inch	10	2.8	1.7	216-144	5000 (1000)

Insulated and Uninsulated Ferrules

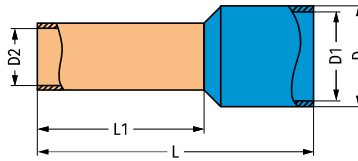

Ferrule; insulated; electro-tin-plated; electrolytic copper; gastight crimped; per DIN 46288 (Part 4/09.09)

Conductor Cross Section	Color	Strip Length	L	L 1	D	D 1	D 2	Item No.	Pack. Unit
0.25 mm ² / 24 AWG	● yellow	7 mm / 0.28 inch	10	6	2.3	1.8	0.85	216-321	1000
0.25 mm ² / 24 AWG	● yellow	9 mm / 0.35 inch	12	8	2.3	1.8	0.85	216-301	1000
0.34 mm ² / 22 AWG	● light turquoise	7 mm / 0.28 inch	10	6	2.5	2	0.85	216-322	1000
0.34 mm ² / 22 AWG	● light turquoise	9 mm / 0.35 inch	12	8	2.5	2	0.85	216-302	1000
0.5 mm ² / 20 AWG	○ white	7 mm / 0.28 inch	12	6	3.1	2.6	1	216-221	1000
0.5 mm ² / 20 AWG	○ white	9 mm / 0.35 inch	14	8	3.1	2.6	1	216-201	1000
0.75 mm ² / 18 AWG	○ gray	8 mm / 0.31 inch	12	6	3.3	2.8	1.2	216-222	1000
0.75 mm ² / 18 AWG	○ gray	10 mm / 0.39 inch	14	8	3.3	2.8	1.2	216-202	1000
1 mm ² / 18 AWG	● red	8 mm / 0.31 inch	12	6	3.5	3	1.4	216-223	1000
1 mm ² / 18 AWG	● red	10 mm / 0.39 inch	14	8	3.5	3	1.4	216-203	1000
1.5 mm ² / 16 AWG	● black	8 mm / 0.31 inch	12	6	4	3.5	1.7	216-224	1000
1.5 mm ² / 16 AWG	● black	10 mm / 0.39 inch	14	8	4	3.5	1.7	216-204	1000
2.08 mm ² / 14 AWG	● yellow	10 mm / 0.39 inch	15	8	4.8	4.2	2.05	216-205	1000
2.5 mm ² / 14 AWG	● blue	10 mm / 0.39 inch	15	8	4.7	4.2	2.2	216-206	1000
4 mm ² / 12 AWG	○ gray	12 mm / 0.47 inch	18	10	5.4	4.8	2.8	216-207	500
6 mm ² / 10 AWG	● yellow	14 mm / 0.55 inch	20	12	6.9	6.3	3.5	216-208	100
10 mm ² / 8 AWG	● red	16 mm / 0.63 inch	22	12	8.4	7.6	4.6	216-209	100
16 mm ² / 6 AWG	● blue	23 mm / 0.91 inch	28	18	9.6	8.8	5.8	216-210	100



Ferrule; uninsulated; electro-tin-plated; electrolytic copper; gastight crimped; per DIN 46288 (Part 4/09.09)

Conductor Cross Section	Strip Length	L	D	D 2	Item No.	Pack. Unit
0.25 mm ² / 24 AWG	5 mm / 0.2 inch	5	1.7	0.75	216-151	1000
0.25 mm ² / 24 AWG	7 mm / 0.28 inch	7	1.7	0.75	216-131	1000
0.34 mm ² / 22 AWG	5 mm / 0.2 inch	5	1.8	0.85	216-152	1000
0.34 mm ² / 22 AWG	7 mm / 0.28 inch	7	1.8	0.85	216-132	1000
0.5 mm ² / 20 AWG	6 mm / 0.24 inch	6	2.1	1	216-121	1000
0.5 mm ² / 20 AWG	8 mm / 0.31 inch	8	2.1	1	216-101	1000
0.75 mm ² / 18 AWG	6 mm / 0.24 inch	6	2.3	1.2	216-122	1000
0.75 mm ² / 18 AWG	8 mm / 0.31 inch	8	2.3	1.2	216-102	1000
1 mm ² / 18 AWG	6 mm / 0.24 inch	6	2.5	1.4	216-123	1000
1 mm ² / 18 AWG	8 mm / 0.31 inch	8	2.5	1.4	216-103	1000
1.5 mm ² / 16 AWG	6 mm / 0.24 inch	6	2.8	1.7	216-124	1000
1.5 mm ² / 16 AWG	8 mm / 0.31 inch	8	2.8	1.7	216-104	1000
2.5 mm ² / 14 AWG	10 mm / 0.39 inch	10	3.4	2.2	216-106	1000
4 mm ² / 12 AWG	10 mm / 0.39 inch	10	4	2.8	216-107	1000
6 mm ² / 10 AWG	12 mm / 0.47 inch	12	4.7	3.5	216-108	500
10 mm ² / 8 AWG	12 mm / 0.47 inch	12	5.8	4.5	216-109	500
16 mm ² / 6 AWG	15 mm / 0.59 inch	15	7.5	5.8	216-110	500